



Gfp **Graphic Finishing**
partners

Where Finishing Comes First.

Gfp 865DH-4RS

Versatile Dual Heat Laminator

For finishing professionals who need versatility, quality, and economy in one machine, the Gfp 865DH-4RS delivers. Turn out thermal encapsulation with low melt films (1.5-10mil), PSA lamination, and mounting jobs quickly and easily.

ULTIMATE FLEXIBILITY

Dual heat for thermal & cold apps

MAXIMIZE PRODUCTIVITY

Inline Rotary Slitters

FAST ROLL CHANGES

Front/Rear Swing-out shafts **EASY**

LOADING

3" Quick-Grip Swing-out Shafts

INDUSTRIAL DESIGN

Years of maintenance-free service



laminating • mounting • encapsulating

Our most flexible, cost-effective laminator yet

Spend less time on set-ups and changeovers with swing-out Quick-Grip supply shafts. Two front rewind shafts allow thermal encapsulation of prints from a roll.




- Labor saving swing-out supply shafts
- Drop-in Quick-Grip rewind shafts
- Photoelectric eye for operator safety
- Independent top and bottom heaters
- Web clutch adjustment for output quality
- Includes rear rewind with rotary slitters
- Swing-up feed table and 38" output height



Includes motorized rear rewind with rotary slitters for roll-to-roll applications.

Slitters not for use with thermal films.

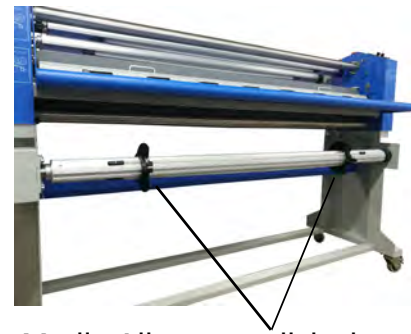

Media Alignment disks keep supply rolls from telescoping

865DH-4RS

Rugged Design
Professional Quality
Proven Performance
Economically Priced

APPLICATIONS

Signs
Posters
POP Displays
Trade show displays
Dry-erase boards
Graphic mounting
Photo mounting
Floor graphics
Window graphics
Vehicle graphics

cTUVus
Safety
Approval



Warranty:

1 year parts & labor.
Installation is included.

Laminating Width	65"
Roller Diameter	5"
Roller Gap	1"
Main rollers	Silicone
Supply roll diameter(max)	16" bottom, 8" top
Film shafts	3" aluminum Quick-Grip
Rear rewind with rotary slitters (Not for use with thermal films.)	Included
Max. temperature	266°F
Heat method	Quartz heater
Film thickness	1.5 - 10mil
Laminating speed	0-13 ft/min
Drive motor	DC geared motor
Pressure Adjustment	Dual hand wheels
Roller heating	Top & Bottom
Power Supply	240v 60HZ Single phase 24A
Power Consumption	Max. 5760W
Dimensions	87" x 34" x 49"
Net Weight w/ stand	846 lbs.
Shipping Dimensions (L x W x H)	90" x 40" x 63" 1129 lbs.

Your local dealer is:

BINDING & LAMINATING
SOUTHWEST
COME TOGETHER. RIGHT NOW.

Southwest Binding & Laminating
109 Millwell Ct, Maryland Heights, MO 63043
www.swbindinglaminating.com
314-739-4400 or 800-325-3628

